




AMERICAN Timken BEARING MFG.CORP.

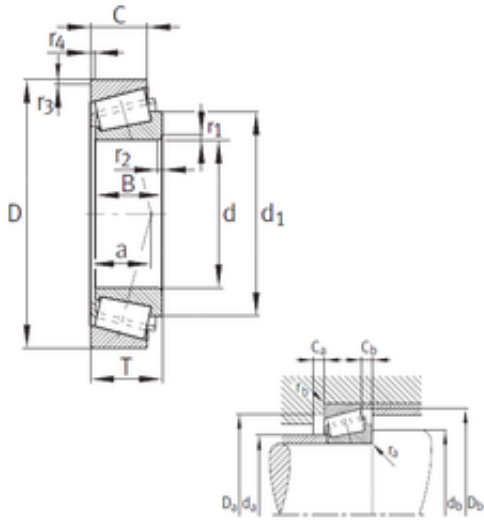

170 mm x 260 mm x 57 mm FAG 32034-X tapered roller bearings

Bearing No. 32034-X

Size	170x260x57 mm
Bore Diameter	170 mm
Outer Diameter	260 mm
Width	57 mm
d	170 mm
D	260 mm
T	57 mm
B	57 mm
C	43 mm
a	57 mm
d1	216 mm
r1 min.	3 mm
r2 min.	2,5 mm
r3 min.	2,5 mm
r5 min.	57 mm
Ca min.	10 mm
Cb min.	14 mm
da max	187 mm
Da min	230 mm
Da max.	248 mm
db min	182 mm
Db min.	249 mm
ra max.	3 mm
rb max.	2,5 mm
Weight	11,4 Kg

32034-X Bearing 2D drawings and 3D CAD models



AMERICAN Timken BEARING MFG.CORP.

Basic dynamic load rating (C)	500 kN
Basic static load rating (C0)	880 kN
Fatigue load limit (Pu)	106
Reference speed	1 690 r/min
Limiting speed	2 380 r/min
Calculation factor (e)	0,44
Calculation factor (Y)	1,35