




# AMERICAN Timken BEARING MFG.CORP.

## INA RSAO40 bearing units

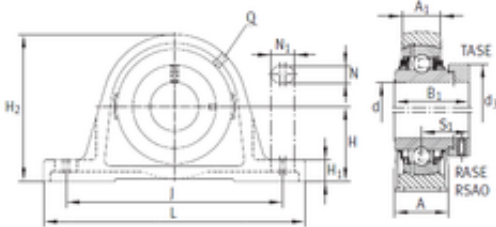

RSAO40 Bearing 2D drawings and 3D CAD models

Bearing No. RSAO40

Bore Diameter	40 mm
d	40 mm
S1	36,6 mm
Thread (Q)	Rp1/8
d3	63 mm
A	60 mm
A1	31 mm
B1	54,6 mm
H	60 mm
H1	22 mm
H2	116 mm
J	170 mm
L	220 mm
N	17,5 mm
N1	27,5 mm
Weight	3,18 Kg
Basic dynamic load rating (C)	44,5 kN
Category	Pillow Block Bearings
Inventory	0.0
Manufacturer Name	SCHAEFFLER GROUP
Minimum Buy Quantity	N/A
Weight / Kilogram	3.808
Product Group	M06110
Number of Mounting Holes	2
Mounting Method	Eccentric Collar
Housing Style	2 Bolt Pillow Block



## AMERICAN Timken BEARING MFG.CORP.

Rolling Element	Ball Bearing
Housing Material	Cast Iron
Expansion / Non-expansion	Non-expansion
Relubricatable	Yes
Insert Part Number	GNE40KRRB
Seals	Double Land Riding Rubber Contact
Housing Configuration	1 Piece Solid
Inch - Metric	Metric
Other Features	Single Row   Heavy Series   Extended Inner Race   With Set Screw
Long Description	2 Bolt Pillow Block; 40MM Bore; 60MM Base to Center Height; Eccentric Collar Mount; Ball Bearing; 160MM Minimum Bolt Spacing; 180MM Bolt Spacing Maximum; Relubricatable; Cast Iron; Double Land Riding
Category	Pillow Block
UNSPSC	31171511
Harmonized Tariff Code	8483.20.40.40
Noun	Bearing
Keyword String	Pillow Block
Manufacturer URL	<a href="http://www.ina.com">http://www.ina.com</a>
Manufacturer Item Number	RSAO40
Weight / LBS	7.01
Bore	1.575 Inch   40 Millimeter
Nominal Bolt Center to Center	6.7 Inch   170 Millimeter
Base to Center Height	2.362 Inch   60 Millimeter
Actual Bolt Center to Center	0 Inch   0Millimeter
Length Thru Bore	2.15 Inch   54.6 Millimeter



## AMERICAN Timken BEARING MFG.CORP.

Bolt Spacing Minimum	6.299 Inch   160Millimeter
Bolt Spacing Maximum	7.087 Inch   180Millimeter